PROFILE OF
CLYDE ROBINSON DITCH
No 2083

LIBERTY TWP. WOOD COUNTY, O.

DITCH BOOK 122 BERT F. HENNING

COUNTY ENGINEER

TREE REMOVAL

Sta 13+0 ~ Geo Crocker ~ 24" Elm ~ $27.50
" 15+30 ~ " " 8" Ash 7.50
" 61+0 ~ A.M. Mercer ~ 48" Cottonwood $50.00

BOTTOM 2 Ft. SLOPES 1¼ to 1

STA. 25-26:- Existing 12" Drain Crosses from North to East Side of open ditch going East. Rebuild Tile at outlet into open ditch, curving same into ditch; place loose stone rip-rap around outlet.

Sta 26+75 and Sta 31+93 under Bays and Wingston Roads, respectively; County to lower or rebuild these culverts.

Sta. 47+90 and Sta. 65+69:- Culverts to be removed by owners.

Sta. 0+0 to Sta. 25+0:- 12" Field Tile is in North bank of ditch. Especial care is to be used in excavating that it is not damaged.

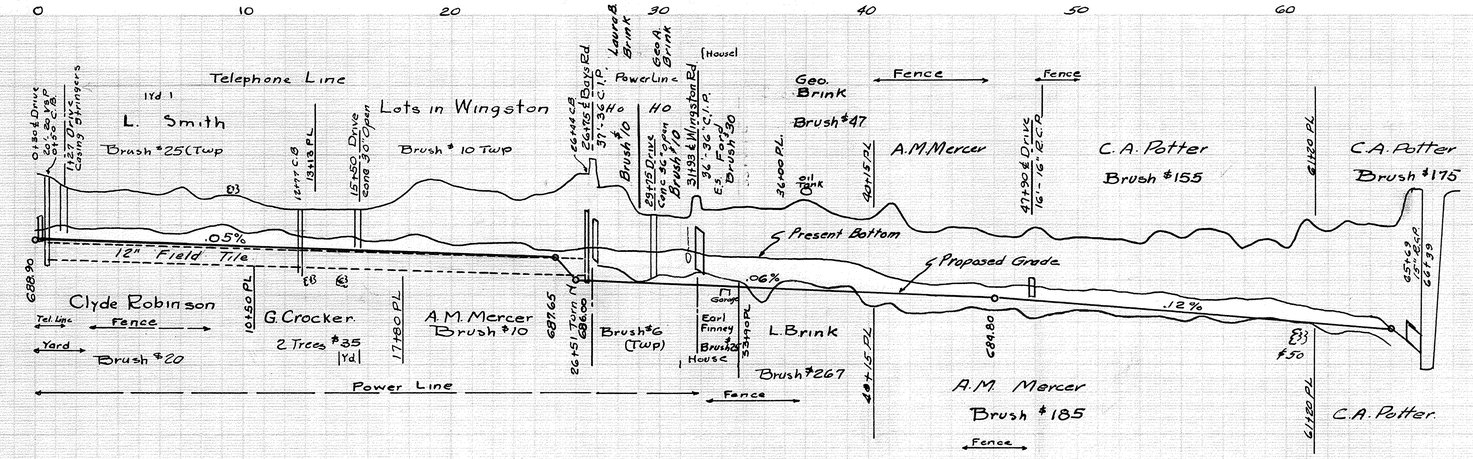

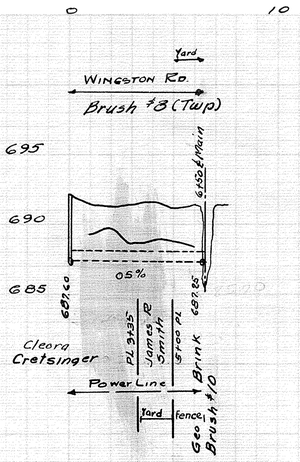

STATION	CUT	TOP WIDTH	CUBIC YARDS
0	4.91	16.7	
1	4.39	15.2	47
2	3.72	13.2	28
3	3.69	13.1	22
4	3.80	13.4	28
5	3.63	12.9	34
6	3.41	12.2	30
7	4.10	14.3	20
8	3.37	12.1	24
9	3.62	12.9	30
10	3.59	12.8	25
11	3.00	11.0	23
12	3.05	11.2	21
13	2.83	10.5	20
14	2.87	10.6	20
15	3.04	11.1	22
16	3.03	11.1	20
17	3.45	12.3	24
18	4.23	15.3	32
19	3.91	14.0	37
20	4.36	15.9	26
21	4.63	16.0	23
22	4.70	16.1	21
23	4.42	16.1	20
24	4.40	15.2	21
25	4.70	15.2	21
26	7.63	24.5	82
27	7.64	21.9	122
28	6.84	22.5	109
29	4.85	14.5	93
30	4.93	16.5	74
31	4.72	16.2	76
32	5.25	18.0	85
33	5.45	18.3	90
34	5.86	19.6	88
35	5.63	18.9	87
36	5.74	19.2	81
37	6.47	21.4	88
38	5.74	19.2	101
39	5.20	17.6	98
40	5.20	17.6	98
41	6.38	21.2	107
42	4.60	15.8	72
43	4.41	15.2	30
44	4.95	16.8	39
45	4.85	16.5	49
46	4.83	16.5	33
47	4.93	15.3	26
48	5.26	17.8	39
49	4.82	15.3	42
50	4.73	16.2	44
51	4.88	16.6	29
52	4.94	16.8	23
53	4.65	16.0	36
54	5.69	19.1	52
55	5.92	18.0	63
56	6.17	24.5	65
57	5.97	19.9	70
58	4.93	16.8	63
59	5.66	19.0	61
60	5.28	17.8	56
61	7.39	24.2	60
62	6.67	22.0	59
63	7.41	24.2	25
64	7.43	24.3	24
65	7.27	23.8	20

Total 3220 C.Y.

STATION	CUT	TOP WIDTH	CUBIC YARDS
0	3.51	12.5	
1	3.85	13.6	82
2	3.69	13.1	73
3	3.91	13.7	60
4	4.21	14.6	55
5	3.72	13.2	56
6	4.12	14.4	46
+50	3.74	13.3	23

TOTAL 395 C.Y.