PROFILE OF
M.F. ROLFES DITCH
No. 2151
TROY TOWNSHIP WOOD COUNTY OHIO
DITCH BOOK 126 ORTON H. JONES
JANUARY 1958 COUNTY ENGINEER

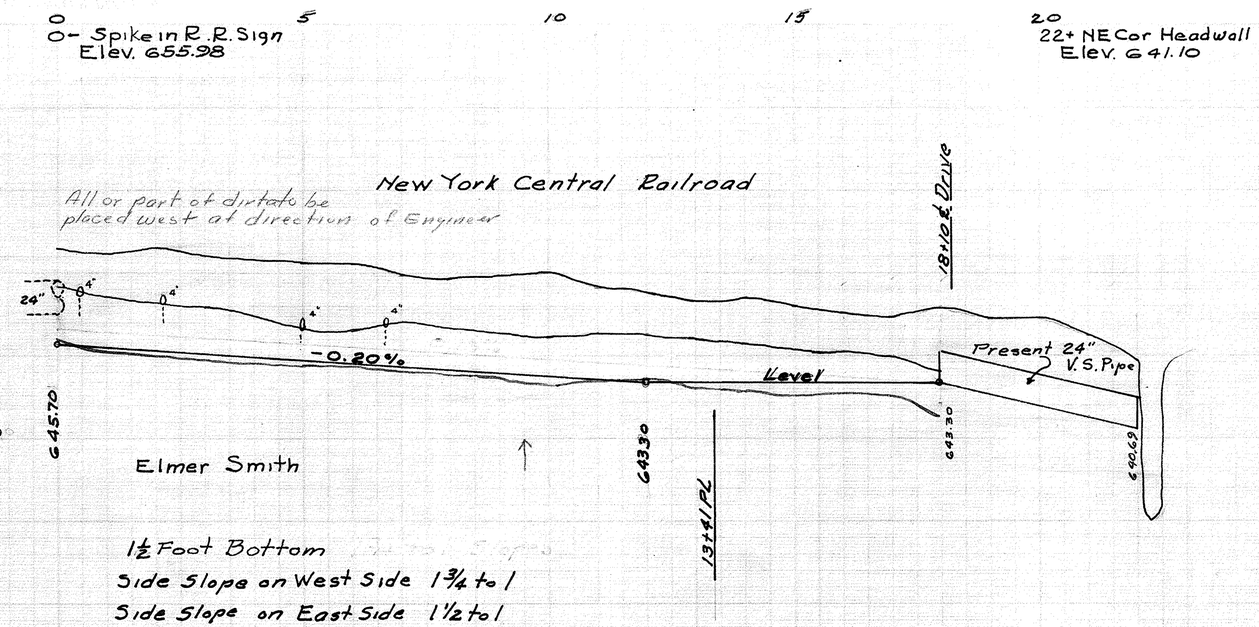

NOTE:-
Contractor to place 5 Ton of Quarry Run Stone at Sta. 0+0 as rip-rap at the direction of Engineer.

1½ Foot Bottom
Side Slope on West Side 1¾ to 1
Side Slope on East Side 1½ to 1

Station 0 to 13+41

Part or all excavation to be placed on West side of ditch at direction of Engineer

Dirt West from 0+0 To 13+41

Sketch showing location of 24" V.S. Pipe at head of ditch Not to scale

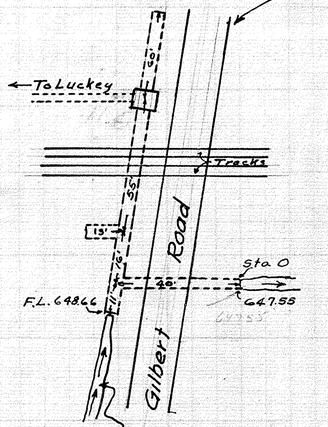

Clean out 100' of ditch to East

Note Contractor to clean out 24" V.S. Pipe and ditch as shown above for Lump Sum. Total length of 24" V.S. Pipe = 195 lin feet.

CUBIC YARDS			186		148		130		126		130		140		144		118		70				1192 C.Y.
CUT	5.76	5.60	6.24	5.87	5.90	5.94	6.00	5.56	5.59	5.95	6.36	5.63	5.48	5.04	5.21	4.67	4.33	4.07	4.58				
STATION	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22