

Found Iron Pin at north 1/4 corner Section 16, T.5 N., R.12 E.

ALEXANDER 26440 ROAD

PARCEL "A"


PARCEL "B"

North & South, center line Section 16, T.5 N., R.12 E.

Assumed NORTH

4" Vitrifired Tile filled with concrete and a 3/8" Iron Rod in the center, set at all points shown thus.

Found Stone Measurement at center Section 16, T.5 N., R.12 E

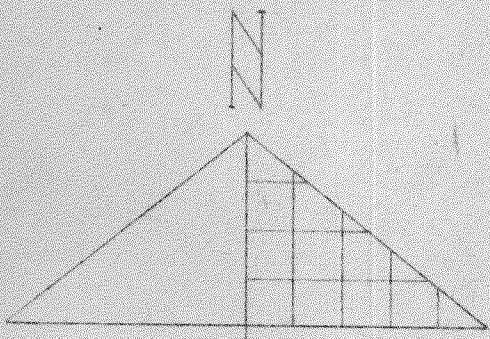

SCALE 1"=400'

EMMETT V. SPITLER
ATTORNEY AT LAW
BOWLING GREEN, OHIO

Donald S. Dalke

Registered Surveyor

540
Fremont

1329.3'

1331.68'

1329.3'

87°38'23"

92°56'45"

Spike with + Cut

North Line of Section 16, T.5 N., R.12 E.

Point of BEGINNING, Line "A"

N. 87°29'00" E. 1329.3'

272°18'30"

92°55'30"

1331.68'

East Line Section 16, T.5 N., R.12 E.

ROAD

Found Iron Pin at east 1/4 corner Section 16, T.5 N., R.12 E.

2649.17'

1510.47'

S. 0°17'30" E. 1310.3'

Point of BEGINNING, Line "B"

S. 0°26'00" E. 1315.7'

Line "B"

180°05'07"

179°46'30"

1325.44'

WAYNE

48°15'39"

1341.34'

91°30'06"