

308  
WESTON

SURVEY

in  
S.E. 1/4, S.E. 1/4, Sec. 26, T 5 N-R 9 E, Weston Twp..  
Wood Co. O..

Control points found at points shown thus  $\Delta$   
Iron pipe set at points shown thus  $\odot$   
P.K. Nails set at points shown thus  $\times$

A parcel of land located in the South East 1/4 of the South East 1/4 of Section 26, Town 5 North-Range 9 East, Weston Township, Wood County, Ohio and described as follows; beginning at the intersection of the south line of the Grantor and the East Line of the said Section 26, said point being a distance of 790.8 feet north of the South East Corner of the said Section 26; thence continuing northerly along the said East Line a distance of 120 feet; thence westerly parallel to the said south line a distance of 250 feet; thence southerly parallel to the said East Line a distance of 120 feet to the said south line; thence easterly along the said south line a distance of 250 feet to the place of beginning and containing 0.688 acres of land more or less but subject to easement for legal highways.

N. Line Sec. 26-U.S. Route 6


E. Line Sec. 26  
S.R. 235

N. Line S. 1/2

N. Line S.E. 1/4  
S.E. 1/4

Ken Evans

52.90.5' County  
52.92.8' State

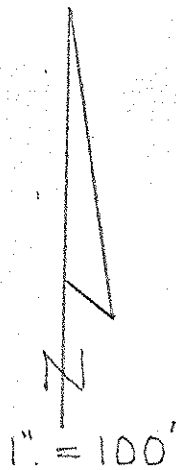

S. Line Grantor  
Occupational

Parcel being conveyed  
0.688 ac. ±

East Line established by Ohio Dept. of Highways

S. Line Sec. 26  
Euler Rd.

Surveyed by H. Morgan  
Aug. 1972 Reg. Sur. 890

308  
WESTON