

MAIN STA. 10+00

MAIN STA. 64+00

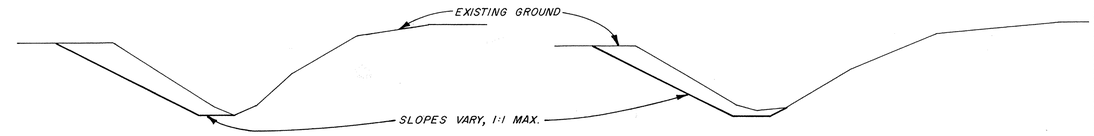

BRANCH STA. 2+00

BRANCH STA. 24+00

TYPICAL SECTIONS

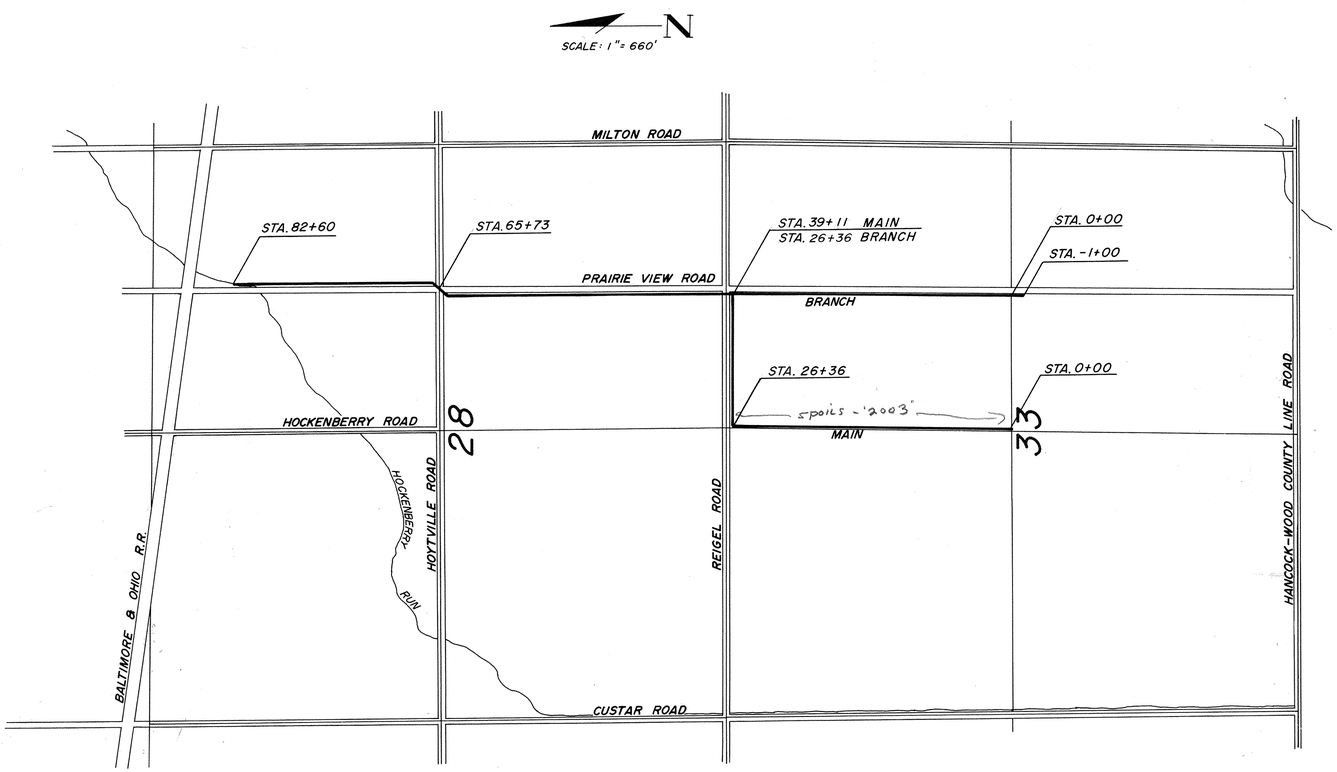

SITE PLAN

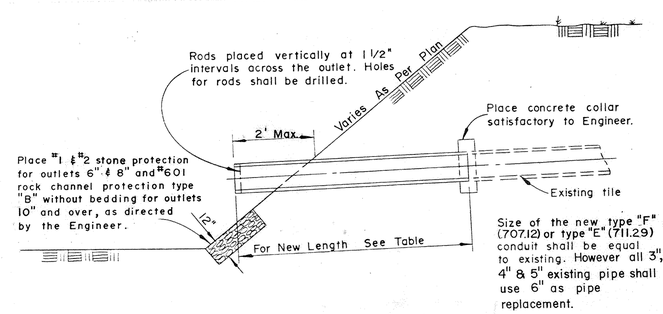

FREEBOARD:

Ditch bottom to pipe invert	TILE SIZE under 6"	6" & 8"	10" & over
Under 2 Ft.	12 Ft.	12 Ft.	20 Ft.
2 Ft. & over	12 Ft.	12 Ft.	20 Ft.

NOTE: Remove sufficient length of existing tile or pipe as directed by the Engineer. Cost of the concrete collar, rock channel protection, vertical rods, removal and disposal of existing pipe shall be included in the cost of the new pipe.

For washed-out tile on the road side, pipe replacement shall be as long as possible without disturbing pavement, and all backfill shall be #304 stone, with a 12" cover of #1 & #2 stone protection extending from toe of slope to top of bank, as directed by the Engineer.

PIPE REPLACEMENT TABLE & DETAIL

LESTER H. POGGEMEYER P.E., INC.
ENGINEERS ARCHITECTS SURVEYORS
121 E. WOOSTER STREET BOWLING GREEN, OHIO 43402
355 W. MAIN STREET LEXINGTON, OHIO 44904

SITE PLAN AND DETAILS

REVISIONS

EXISTING DRAWN BY	PROPOSED DRAWN BY
HP 10/79	RAD 10/79
CHECKED BY	CHECKED BY
RLB 10/79	RLB 10/79
APPROVED BY	APPROVED BY

JOB NUMBER 78169