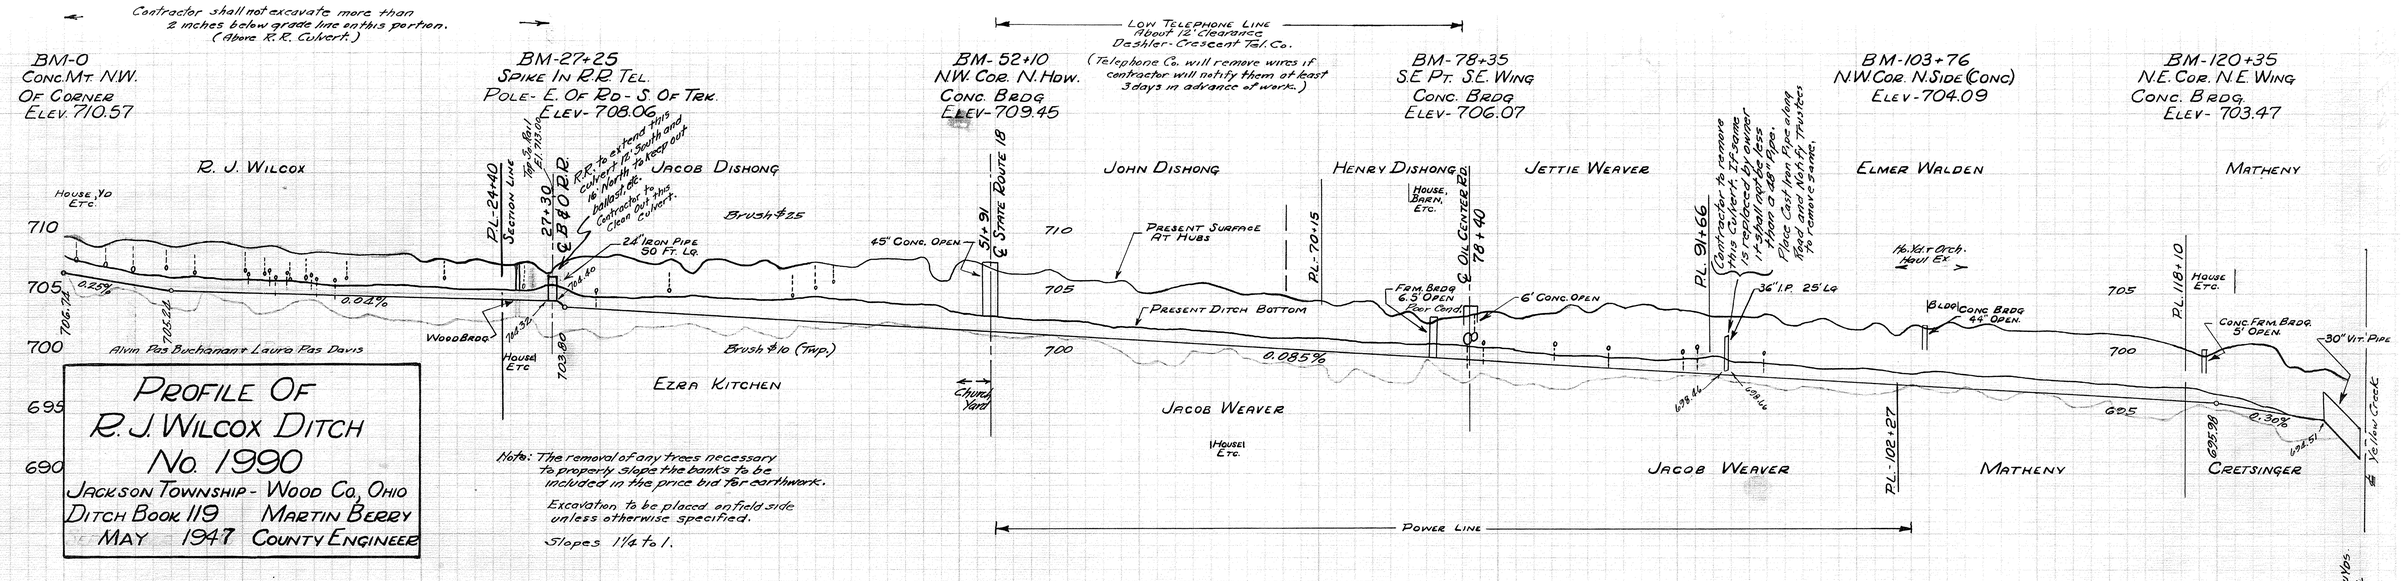

Profile Of R. J. Wilcox Ditch No. 1990

Jackson Township - Wood Co, Ohio

Ditch Book 119 — Martin Berry

May 1947 — County Engineer

Note: The removal of any trees necessary to properly slope the banks to be included in the price bid for earthwork.

Excavation to be placed on field side unless otherwise specified.

Slopes 1¼ to 1.

Station	Cut	Top Width	Bottom Width	Cubic Yds.
0	3.03	100	25	
1	2.98	100	40	
2	2.68	93	34	
3	3.48	113	33	
4	3.70	118	37	
5	3.90	123	38	
6	3.85	115	36	
7	3.92	123	41	
8	4.02	125	48	
9	4.11	129	47	
10	3.63	118	2.5	42
11	3.94	123	41	
12	3.87	123	41	
13	3.30	108	38	
14	3.56	115	38	
15	3.23	105	40	
16	3.45	113	37	
17	3.24	105	35	
18	3.33	108	33	
19	3.34	123	34	
20	2.75	100	2.5	34
21	3.43	110	36	
22	2.74	93	29	
23	3.40	115	31	
24	3.00	110	30	
25	2.62	90	30	
26	3.33	108	30	
27	2.73	80	31	
28	4.00	125	30	
29	4.43	135	41	
30	4.28	133	2.5	48
31	4.46	143	50	
32	4.17	130	54	
33	4.05	128	57	
34	4.29	140	54	
35	4.32	140	55	
36	4.67	143	54	
37	4.76	145	58	
38	4.30	133	55	
39	4.08	128	58	
40	4.10	128	2.5	62
41	4.45	143	68	
42	4.97	150	77	
43	4.70	143	79	
44	4.76	145	78	
45	5.44	160	84	
46	5.67	168	91	
47	5.62	165	91	
48	5.96	175	95	
49	4.95	150	85	
50	5.80	170	2.5	71
51	5.71	168	70	
52	5.24	155	59	
53	4.89	148	46	
54	5.03	150	44	
55	5.04	150	49	
56	4.62	140	46	
57	4.81	145	42	
58	4.66	143	42	
59	4.94	148	39	
60	5.06	125	2.5	35
61	4.14	128	33	
62	4.64	140	43	
63	5.00	150	55	
64	5.00	150	57	
65	4.47	138	42	
66	4.06	133	25	
67	4.19	138	27	
68	4.38	135	33	
69	4.05	128	33	
70	4.04	130	2.5	31
71	3.78	120	26	
72	4.29	133	30	
73	4.24	130	32	
74	3.23	130	27	
75	3.81	120	32	
76	2.25	83	32	
77	3.49	113	30	
78	3.56	115	33	
79	4.00	125	34	
80	4.23	130	2.5	36
81	3.52	113	33	
82	4.00	128	36	
83	4.19	130	31	
84	5.05	153	40	
85	4.97	138	40	
86	5.32	158	31	
87	5.09	153	33	
88	5.45	163	35	
89	5.04	153	34	
90	5.10	153	2.5	34
91	5.02	150	38	
92	4.67	143	44	
93	4.85	148	38	
94	4.12	128	33	
95	5.17	155	43	
96	4.48	135	43	
97	4.62	140	37	
98	5.12	153	38	
99	4.50	138	36	
100	4.29	133	2.5	37
101	5.12	153	44	
102	4.08	128	46	
103	5.00	150	41	
104	4.74	143	43	
105	5.46	163	50	
106	4.97	150	48	
107	5.20	158	47	
108	4.95	150	45	
109	5.01	150	38	
110	5.09	153	2.5	40
111	5.21	155	43	
112	5.07	153	43	
113	5.14	153	43	
114	5.17	155	46	
115	5.19	155	46	
116	4.83	145	38	
117	4.71	143	32	
118	4.39	135	36	
119	3.59	115	35	
120	4.26	133	2.5	30
121	5.07	153	41	
122	5.45	163	46	
123	5.50	163	44	
124	4.14	128	33	
125	4.03	125	28	
126	4.57	139	10	
127				
128				
			Total	5395 cu. yds.